


2x $\varnothing 10$ H8/20 / 180

12x $\varnothing M10$ T 20 / 200
Servotak[®]
PRECISION GEARBOXES

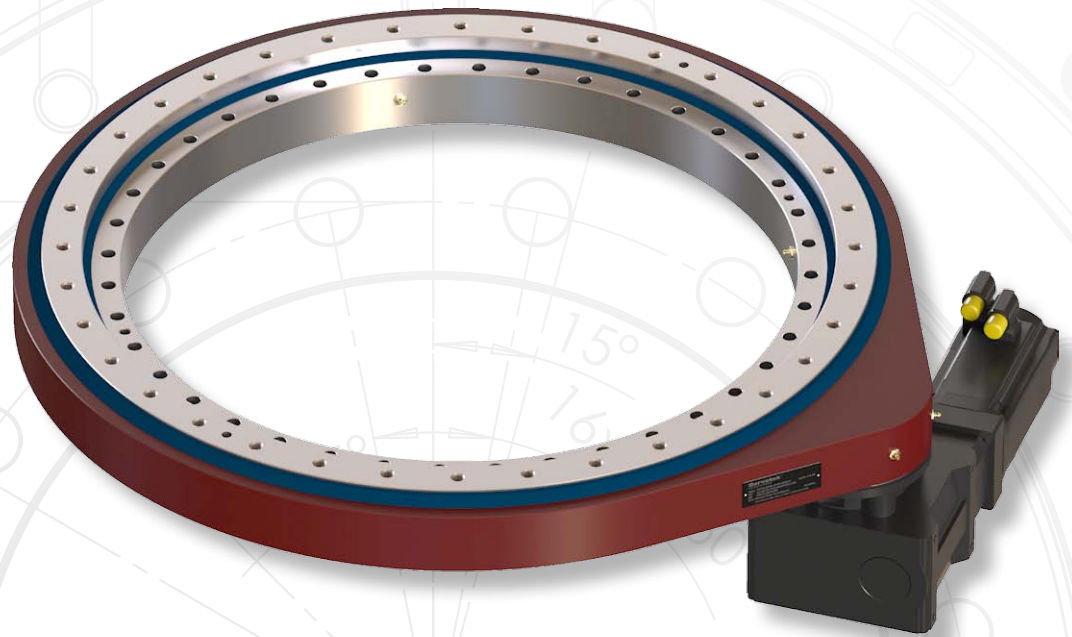



16x $\varnothing 10,50$

2x $\varnothing 8$ H7

SRT-M-0785-1M

SRT-M-0785-1M

Dimensions

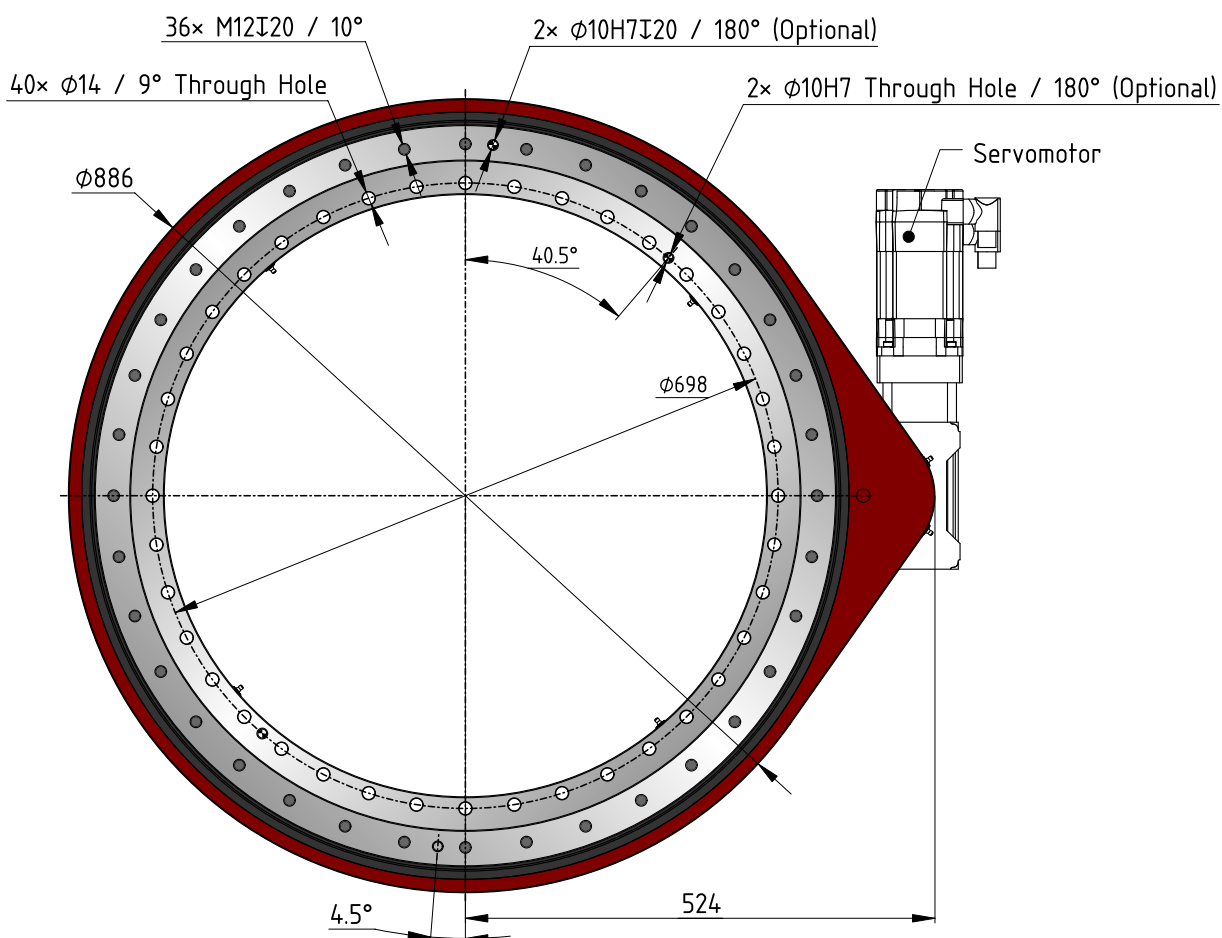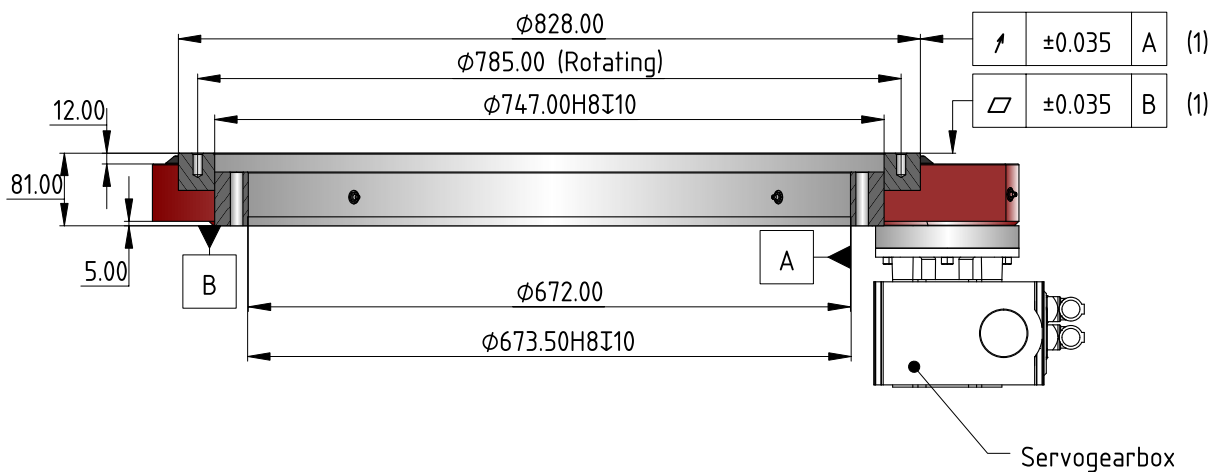

(1) Values valid while supported by a precision machined surface on a support structure with sufficient stiffness. Subject to technical improvements without prior notice.


SRT-M-0785-1M

Technical Data

Transmission		Standard Precision (P2)	High Precision (P1)
Turning Direction		Programmable, reversible	
Internal Ratio		13.8:1	13.8:1
Backlash	arcmin	≤1.40	≤0.90
Moment of Inertia	kg·m ²	0.098	0.098
Efficiency ⁽¹⁾	%	89	91
No Load Starting Input Torque	N·m	6.01	6.01
Operating Temperature	°C	-15 to +50	-15 to +50
Mass (without Gearmotor)	kg	121	121

(1) This value remains constant and is independent of output torque and input speed.

Output Torque Capacity as per DIN-3990

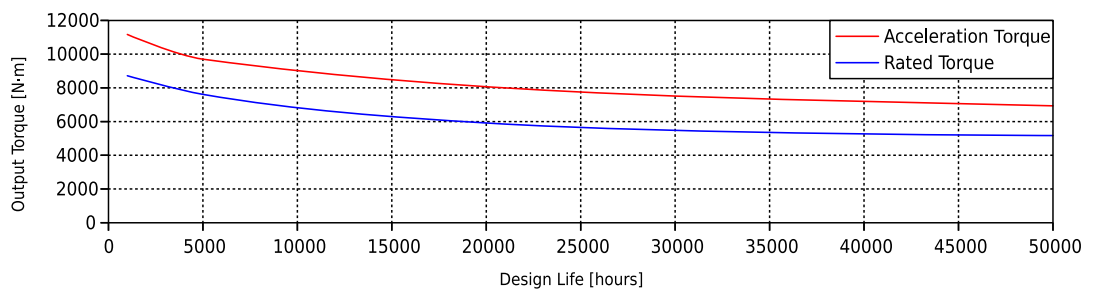

Curves for Standard Precision (P2) SRT actuators.


Gearbox	Total Transmission Ratio
SVS (Right Angle)	103:1 to 1380:1
MQ (Right Angle)	69:1 to 1145:1
MA (Right Angle)	55:1 to 5382:1
SG (Coaxial)	41:1 to 13800:1

Bearing Load Capacity		
Basic Static Axial Load Rating C_{0a} ⁽¹⁾	N	2066750
Basic Dynamic Axial Load Capacity C_a ⁽²⁾	N	257916
Basic Static Radial Load Capacity C_{0r} ⁽¹⁾	N	948365
Basic Dynamic Radial Load Capacity C_r ⁽²⁾	N	254283

(1) Values calculated as per ISO-76 and ISO/TR-10657.

(2) Values calculated as per ISO-281 and ISO/TR-1281-1.

Bearing Load Capacity

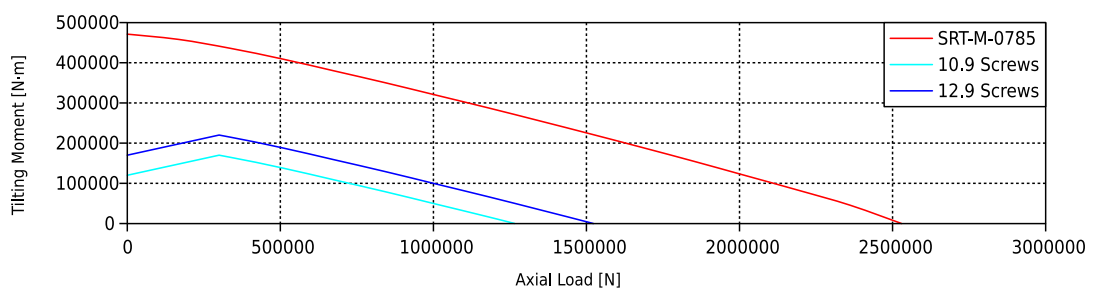

Limiting Load Diagram calculated with a Static Safety Factor SF=1. Values calculated at the bearing raceway, for a supported axial load. Support structure must be sufficiently rigid, and must be machined and level. The operating load point must be under the curve, and a service factor depending on machine type and desired service life must be applied.