


2x  $\varnothing 10$  H8 / 20 / 180

12x  $\varnothing M10$  T 20 / 200  
**Servotak**<sup>®</sup>  
PRECISION GEARBOXES

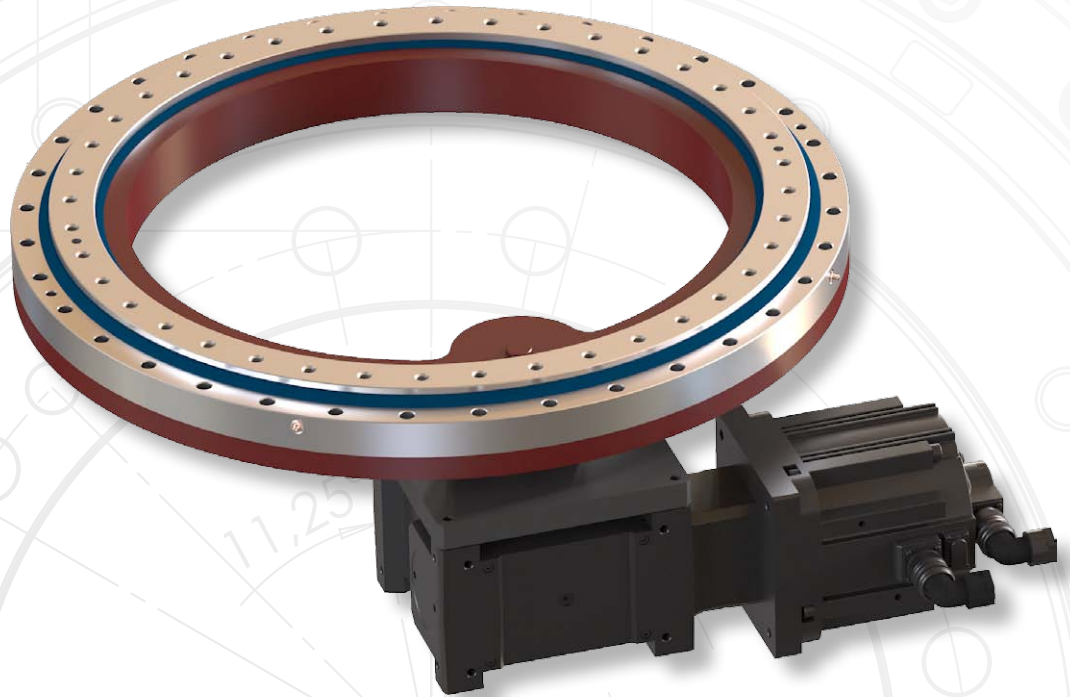

11,25

45°


2x  $\varnothing 8$  H7

16x  $\varnothing 10,50$

**SRT-N-0698-1 M**

# SRT-N-0698-1M

## Dimensions

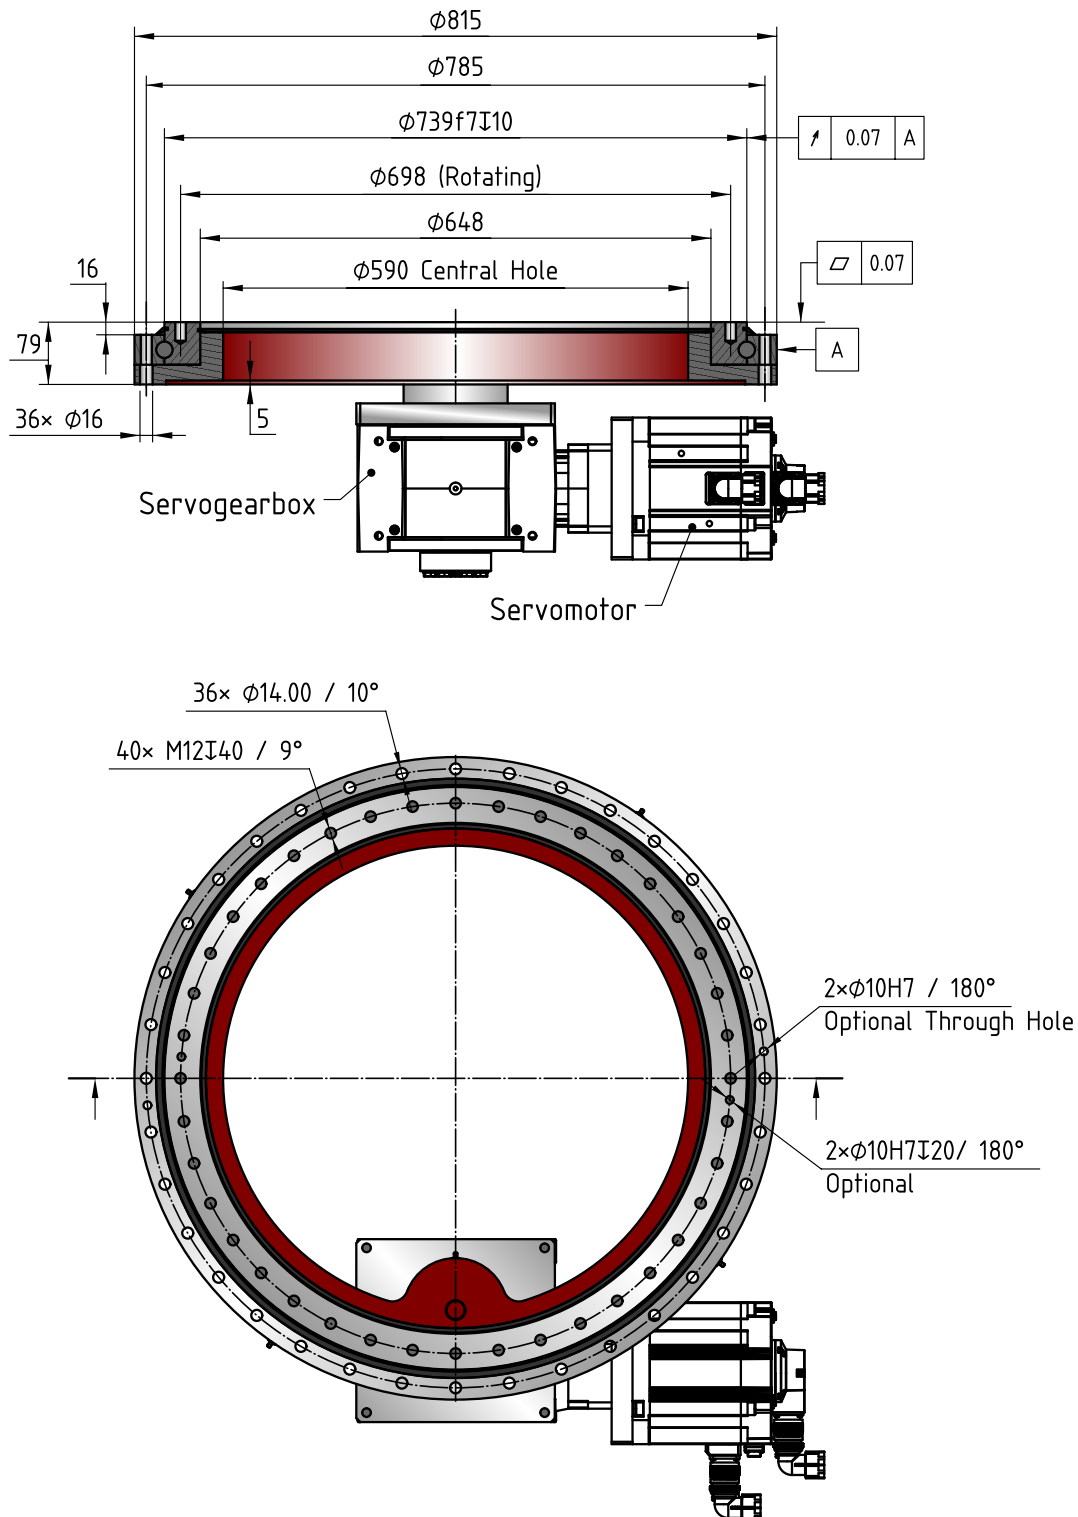

(1) Values valid while supported by a precision machined surface on a support structure with sufficient stiffness. Subject to technical improvements without prior notice.


# SRT-N-0698-1M

## Technical Data

Transmission		Standard Precision (P2)	High Precision (P1)
Turning Direction		Programmable, reversible	
Internal Ratio		10.80	10.80
Backlash	arcmin	≤2.4	≤1.2
Moment of Inertia	kg·m <sup>2</sup>	0.0136	0.0136
Efficiency <sup>(1)</sup>	%	90	93
No Load Starting Input Torque	N·m	5.74	5.74
Operating Temperature	°C	-15 to +50	-15 to +50
Mass (without Gearmotor)	kg	102	102

(1) This value remains constant and is independent of output torque and input speed.

Output Torque Capacity as per DIN-3990

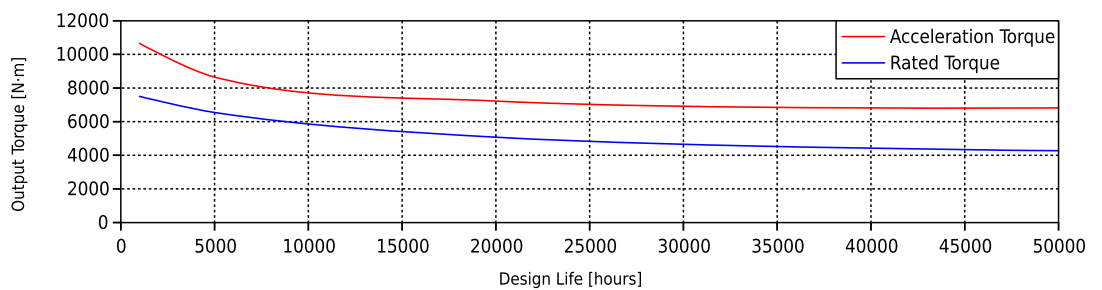

Curves for Standard Precision (P2) SRT actuators.


Gearbox	Total Transmission Ratio
SVS (Right Angle)	81 to 1080
MQ (Right Angle)	54 to 894
MA (Right Angle)	43 to 4212
SG (Coaxial)	32 to 10800

Bearing Load Capacity		
Basic Static Axial Load Rating $C_{0a}$ <sup>(1)</sup>	N	1778940
Basic Dynamic Axial Load Capacity $C_a$ <sup>(2)</sup>	N	244173
Basic Static Radial Load Capacity $C_{0r}$ <sup>(1)</sup>	N	816276
Basic Dynamic Radial Load Capacity $C_r$ <sup>(2)</sup>	N	240809

(1) Values calculated as per ISO-76 and ISO/TR-10657.

(2) Values calculated as per ISO-281 and ISO/TR-1281-1.

Bearing Load Capacity

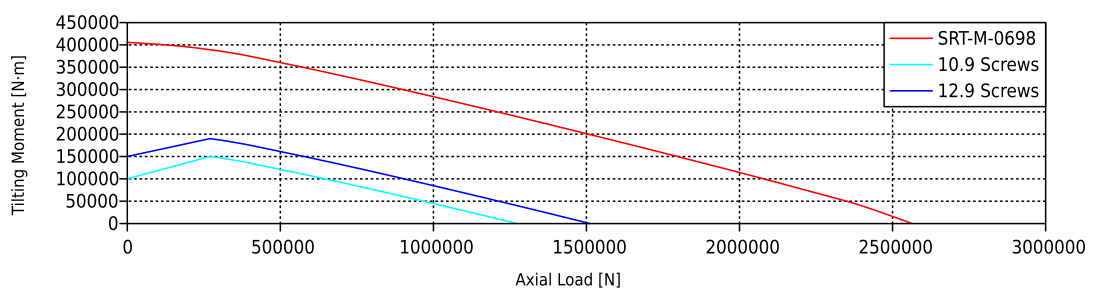

Limiting Load Diagram calculated with a Static Safety Factor SF=1. Values calculated at the bearing raceway, for a supported axial load. Support structure must be sufficiently rigid, and must be machined and level. The operating load point must be under the curve, and a service factor depending on machine type and desired service life must be applied.